



INVICTA DOOR™

Email to: sales@sscorp.com or
Fax to: 330.556.6686

STANDARD LIFT FORM

CUSTOMER INFORMATION:

Customer ID: _____



Company Name: _____

Contact Name: _____

Phone Number: _____

Email Address: _____

STANDARD LIFT:

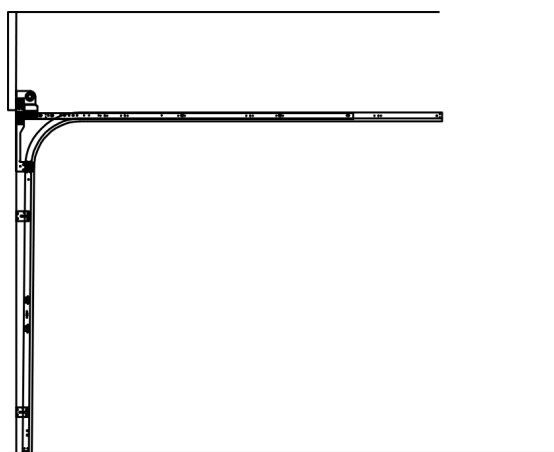

- 1 Standard height: 84 1/16" | Caravan: 100" Standard width: 192 1/8"
- 2 Sideroom: minimum 5 7/8"
- 3 Minimum 15 3/4"
- 4 Depth of door entrance into premises: Minimum: 133 7/8"

DOOR INFORMATION:

Width: _____ Height: _____

Side Room _____ Side Room: _____
(Left) (Right)

Backroom: _____ Headroom: _____

Commercial

Residential

TRACK: 2" 3"

TRACK/GAUGE THICKNESS: _____

RADIUS: 12" 15"

MOUNT TYPE: Jamb CSRA TRA

MOUNT SURFACE: Wood Steel Concrete

PREASSEMBLED VERTICALS Bolt Rivet

SHAFT TYPE: Hollow Solid

WINDOWS


Panel: Short Long LHR

Inserts: Yes No


Style Short: Stockton Stockbridge
Cascade Prairie
Waterton

Style Long: Stockton Stockton 8 Square
Long Cascade Long Prairie
Straight Stockbridge 2PC Arched Stockton
2 PC Arched Stockbridge

Glass Type: Plain Obscure
Grey Tinted Acid Etched



**HORIZONTAL
ANGLE DOWN & OUT**
(most common)



**HORIZONTAL
ANGLE UP & OUT**

NOTES:

- Vertical track is typically door height -8"
- 3" track is always 15" radius & 0.97" thick
- 2" track is available in 0.041, 0.051, 0.063, 0.075, & 0.083
- Horizontal angles available in 1.25 & 2" angles
- Horizontal angle lengths in inches: 27, 41, 65, 82, 90, 113, 137, 162, 186, 210

- Flag brackets are only good to about 12' tall doors
- Jamb brackets only go to #14, so 2" thick doors are limited to 10 panels
- Jamb brackets are preassembled to vertical track with bolt or rivet and are only available for 7' & 8' tall doors