

HIGH LIFT FORM

15" RADIUS



CUSTOMER INFORMATION


CUSTOMER ID _____	COMPANY NAME _____
CONTACT NAME _____	PHONE NUMBER _____
EMAIL ADDRESS _____	

DOOR INFORMATION

MODEL # _____	RESIDENTIAL	COMMERCIAL
WIDTH _____	HEIGHT _____	
SIDE ROOM (LEFT) _____	SIDE ROOM (RIGHT) _____	
BACKROOM _____	HEADROOM _____	
TRACK:	2"	3"
ROOF PITCH: (if Applicable)	_____	
HIGH-LIFT DIMENSIONS:	_____	
MOUNT TYPE:	JAMB	CSRA TRA
MOUNT SURFACE:	WOOD	STEEL CONCRETE
SHAFT TYPE:	HOLLOW	SOLID
OPERATION:	MANUAL	MOTOR

WINDOW & GLASS INFORMATION

INSULATION:	YES	NO
GLASS TYPE:	PLAIN	OBSCURE
	GRAY TINTED	ACID ETCHED





RESIDENTIAL		
PANEL:	SHORT	LONG
INSERTS:	YES	NO
STYLE SHORT:	STYLE LONG:	
Stockton	Stockton	
Stockbridge	Stockton 8 Square	
Cascade	Long Cascade	
Prairie	Long Prairie	
Waterton	Straight Stockbridge	
	2PC Arched Stockton	
	2 PC Arched Stockbridge	

COMMERCIAL	
WINDOW INSERT:	
	1224
	1225*
	0824
	0624

- NOTES:**
- Deep Ribbed doors (1000 Series) can only have 1225 Window Insert

FORMULAS FOR MEASURING HIGH LIFT

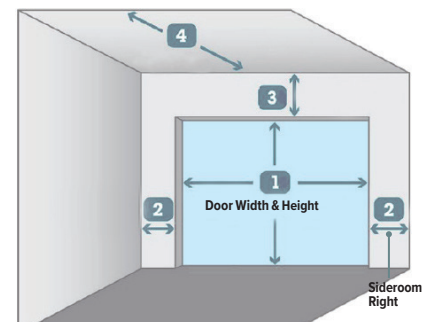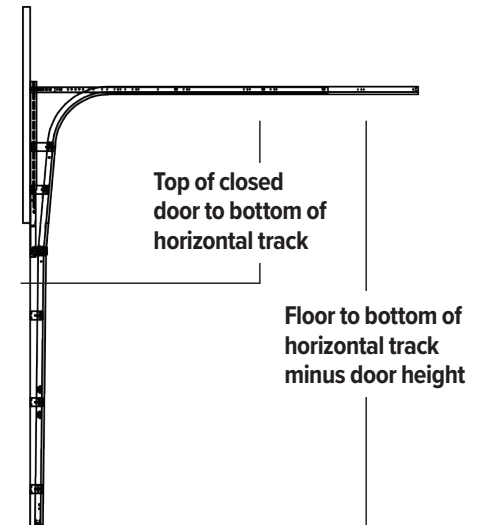

- 1 Standard height: 84 1/16" | Caravan: 100"
Standard width: 192 1/8"
- 2 Sideroom: minimum 5 7/8"
- 3 Minimum 15 3/4"
- 4 Depth of door entrance into premises:
Minimum: 133 7/8"

NOTES:

- Vertical track is typically door height -8"
- 3" track is always 15" radius & 0.97" thick
- 2" track is available in 0.041, 0.051, 0.063, 0.075, & 0.083
- Horizontal angles available in 1.25 & 2" angles
- Horizontal angle lengths in inches: 27, 41, 65, 82, 90, 113, 137, 162, 186, 210
- Flag brackets are only good to about 12' tall doors
- Jamb brackets only go to #14, so 2" thick doors are limited to 10 panels
- Jamb brackets are preassembled to vertical track with bolt or rivet and are only available for 7' & 8' tall doors