

ROOF PITCH FORM



CUSTOMER INFORMATION


CUSTOMER ID _____	COMPANY NAME _____
CONTACT NAME _____	PHONE NUMBER _____
EMAIL ADDRESS _____	

DOOR INFORMATION

MODEL # _____	RESIDENTIAL	COMMERCIAL	
WIDTH _____	HEIGHT _____		
SIDE ROOM (LEFT) _____	SIDE ROOM (RIGHT) _____		
BACKROOM _____	HEADROOM _____		
LIFT STYLE:	STANDARD	HIGH	
TRACK:	2"	3"	
RADIUS:	12"	15"	LHR
HIGH LIFT: (if Applicable) _____			
MOUNT TYPE:	JAMB	CSRA	TRA
MOUNT SURFACE:	WOOD	STEEL	CONCRETE
PREASSEMBLED VERTICALS :	BOLT	RIVET	
SHAFT TYPE:	HOLLOW	SOLID	
OPERATION:	MANUAL	MOTOR	

WINDOW & GLASS INFORMATION

INSULATION:	YES	NO
GLASS TYPE:	PLAIN	OBSCURE
	GRAY TINTED	ACID ETCHED




RESIDENTIAL	
PANEL:	SHORT LONG
INSERTS:	YES NO
STYLE SHORT:	STYLE LONG:
Stockton	Stockton
Stockbridge	Stockton 8 Square
Cascade	Long Cascade
Prairie	Long Prairie
Waterton	Straight Stockbridge
	2PC Arched Stockton
	2 PC Arched Stockbridge

COMMERCIAL
WINDOW INSERT:
1224
1225*
0824
0624

- NOTES:**
- Deep Ribbed doors (1000 Series) can only have 1225 Window Insert

FORMULA FOR ROOF PITCH

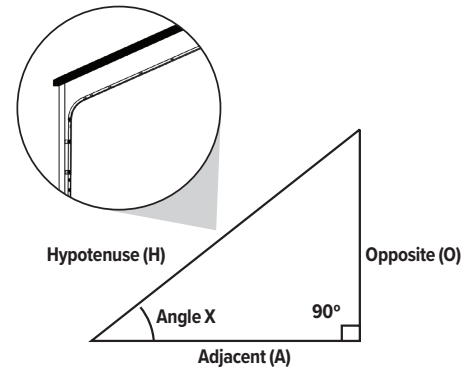


For this calculation to work, a minimum of 2 fields must be entered.

Length of H: _____

Length of O: _____

Length of A: _____

Result: _____

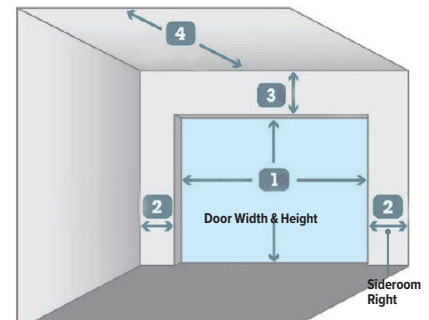

- 1 Standard height: 84 1/16" | Caravan: 100"
Standard width: 192 1/8"
- 2 Sideroom: minimum 5 7/8"
- 3 Minimum 15 3/4"
- 4 Depth of door entrance into premises:
Minimum: 133 7/8"

NOTES:

- Vertical track is typically door height -8"
- 3" track is always 15" radius & 0.97" thick
- 2" track is available in 0.041, 0.051, 0.063, 0.075, & 0.083
- Horizontal angles available in 1.25 & 2" angles
- Horizontal angle lengths in inches: 27, 41, 65, 82, 90, 113, 137, 162, 186, 210
- Flag brackets are only good to about 12' tall doors
- Jamb brackets only go to #14, so 2" thick doors are limited to 10 panels
- Jamb brackets are preassembled to vertical track with bolt or rivet and are only available for 7' & 8' tall doors