

STANDARD LIFT FORM



CUSTOMER INFORMATION

CUSTOMER ID _____	COMPANY NAME _____
CONTACT NAME _____	PHONE NUMBER _____
EMAIL ADDRESS _____	

DOOR INFORMATION

MODEL # _____	RESIDENTIAL	COMMERCIAL
WIDTH _____	HEIGHT _____	
SIDE ROOM (LEFT) _____	SIDE ROOM (RIGHT) _____	
BACKROOM _____	HEADROOM _____	



TRACK:	2"	3"	
RADIUS:	12"	15"	LHR
MOUNT TYPE:	JAMB	CSRA	TRA
MOUNT SURFACE:	WOOD	STEEL	CONCRETE
PREASSEMBLED VERTICALS :	BOLT	RIVET	
SHAFT TYPE:	HOLLOW	SOLID	
OPERATION:	MANUAL	MOTOR	

WINDOW & GLASS INFORMATION

INSULATION:	YES	NO
GLASS TYPE:	PLAIN	OBSCURE
	GRAY TINTED	ACID ETCHED



STANDARD LIFT

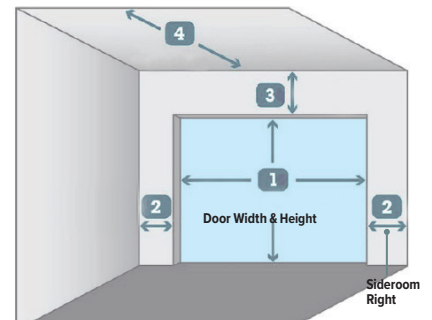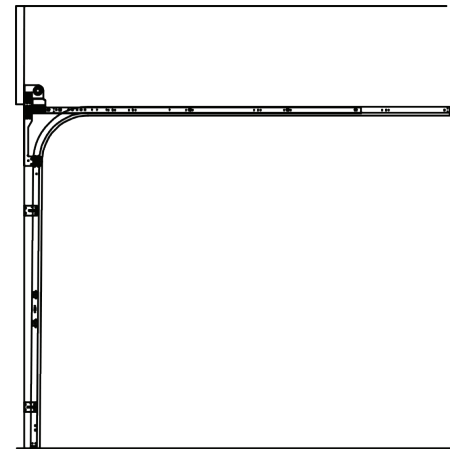

- 1 Standard height: 84 1/16" | Caravan: 100"
Standard width: 192 1/8"
- 2 Sideroom: minimum 5 7/8"
- 3 Minimum 15 3/4"
- 4 Depth of door entrance into premises:
Minimum: 133 7/8"

RESIDENTIAL		
PANEL:	SHORT	LONG
INSERTS:	YES	NO
STYLE SHORT:	STYLE LONG:	
Stockton	Stockton	
Stockbridge	Stockton 8 Square	
Cascade	Long Cascade	
Prairie	Long Prairie	
Waterton	Straight Stockbridge	
	2PC Arched Stockton	
	2 PC Arched Stockbridge	

COMMERCIAL	
WINDOW INSERT:	
	1224
	1225*
	0824
	0624

- NOTES:**
- Deep Ribbed doors (1000 Series) can only have 1225 Window Insert

- NOTES:**
- Vertical track is typically door height -8"
 - 3" track is always 15" radius & 0.97" thick
 - 2" track is available in 0.041, 0.051, 0.063, 0.075, & 0.083
 - Horizontal angles available in 1.25 & 2" angles
 - Horizontal angle lengths in inches: 27, 41, 65, 82, 90, 113, 137, 162, 186, 210
 - Flag brackets are only good to about 12' tall doors
 - Jamb brackets only go to #14, so 2" thick doors are limited to 10 panels
 - Jamb brackets are preassembled to vertical track with bolt or rivet and are only available for 7' & 8' tall doors